



Large-screen projectors that provide an experience you'll never forget!
~ Image Quality and Functionality Unlike Any Other ~

New **WD3300U**
XD3200U






WD3300U/XD3200U

WXGA / XGA PROJECTOR

Brilliant Color™	Color Enhancer	sRGB	3D/Y/C Digital Comb	PinP*	User Logo Projection	Remote Mouse Control	Page up/down	10W Speaker	Motorized Lens Shift
Password Lock	Instant Shutdown	Center Lens	Long-life Lamp	Low Standby Power	Top / Side Loading Lamp	LAN (RJ-45)	DVI	HDMI	Low Fan Noise

Picture Performance: ■ Presentation: ■ User Friendly: ■ * Only XD3200U.

Input and Output Terminals

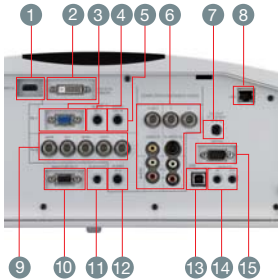

- 1 HDMI terminal
- 2 DVI-D (HDCP) terminal (DVI-D 24-pin)
- 3 Computer / Component Video IN-1 terminal
- 4 Audio IN-1 terminal (Mini jack)
- 5 Audio DVI-D terminal (Mini jack)
- 6 Video IN / Audio IN terminal
- 7 DC OUT [5V 1.5A (Max)]
- 8 LAN (RJ-45) terminal
- 9 Computer / Component Video IN-2 terminals
- 10 Monitor OUT terminal (Mini D-SUB 15-pin)
- 11 Audio OUT terminal (Mini jack)
- 12 Audio IN-2 terminal (Mini jack)
- 13 USB (Computer) terminal
- 14 Remote IN / OUT
- 15 Serial terminal (D-SUB 9-pin)

Specifications

Model	WD3300U	XD3200U
Display Technology	0.65" 1-Chip DMD	0.7" 1-Chip DMD
Resolution	1280x800 (Total 1,024,000 pixels)	1024x768 (Total 786,432 pixels)
Brightness	4000lm	4500lm
Contrast	2300 : 1 (on / off)	2500 : 1 (on / off)
Picture Size	40" - 300"	
Throw Ratio	1.7 ~ 2.4	
Source Lamp	264W (Shut-off Time 4000hr) with Low Mode 330W (Shut-off Time 2000hr) with Standard Mode	
Computer Compatibility	640x400 ~ 1600x1200 True : 1280x800, Sync on Green available	640x480 ~ 1600x1200 True : 1024x768, Sync on Green available
Video Compatibility	NTSC / NTSC4.43 / PAL (including PAL-M, N) / SECAM / PAL-60, Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p 50/60Hz), 1080i (1125i 50/60Hz), 1080p (1125p 50/60Hz), SCART (RGB+1V sync)	
Pc Input Terminals	mini D-sub 15pin×1, 5 BNC×1, DVI-D (with HDCP)×1 Audio : stereo mini jack (ø3.5mm)×3	
Video Input Terminals	Video: HDMI(ver.1.2)×1, RCA×1 or BNC×1, S-Video(4pin)×1 or S-Video Y/C(BNC) Audio: RCA (L, R)×2	
Output Terminals	RGB: mini D-sub 15pin×1, DC Out: 5V 1.5A (MAX) Audio: stereo mini jack (ø3.5mm)×1	
Communication Terminals	LAN (RJ-45)×1, RS-232C:D-sub 9pin×1, USB×1 (Mouse control), Wired remote in : stereo mini jack (ø3.5mm)×1 Wired remote out : stereo mini jack (ø3.5mm)×1	
Audio Speaker	10W mono	
Fan Noise	26dBA (Lamp Low Mode)	
Dimensions(W×H×D)	450×187×373mm/17.7×7.4×14.7 in (excluding terminal cover)	
Weight	10.3kg /22.7lbs (excluding detachable terminal cover)	
Power Supply	AC100 - 240V, 50/60Hz	
Option	Lamp: VLT-XD3200LP Lens: OL-XD2000SZ, OL-XD2000LZ, OL-XD2000TZ, OL-XD2000FR	


*Compliance with ISO21118-2005

*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

*DLP™ (Digital Light Processing) and BrilliantColor™ are trademarks of Texas Instruments.

Screen Size and Projection Distance / Optional Lenses

Refer to the following table to determine the screen size.

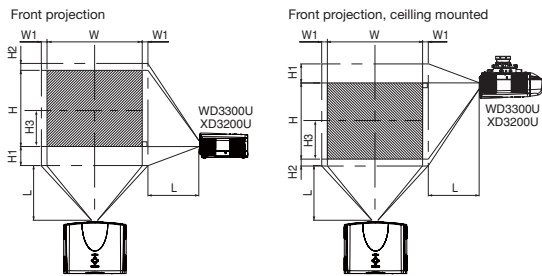

A wide variety of optional lenses is available to suit any operating or user requirement.



WD3300U

Screen size (WXGA 16:10)			Default height projected image(H)		Distance from screen(L)				Movable V position from Default position				Movable H position from Default position			
Diagonal Size	Width	Height			Max. Zoom	Min. Zoom			Down (H1)	Up (H2)	Down (H1)	Up (H2)	Left (W1)	Right (W1)	Left (W1)	Right (W1)
inch	cm	inch	cm	inch	inch	m	inch	m	inch	cm	inch	cm	inch	cm	inch	cm
40	102	34	86	21	54	2	6	58	1.5	80	2.0	12+0→2	30+0→6	3+0→3	9+0→9	
60	152	51	129	32	81	3	9	88	2.2	121	3.1	18+0→3	46+0→9	5+0→5	13+0→13	
80	203	68	172	42	108	5	12	118	3.0	162	4.1	24+0→4	61+0→11	7+0→7	17+0→17	
100	254	85	215	53	135	6	15	148	3.8	203	5.2	30+0→6	76+0→14	9+0→9	22+0→22	
150	381	127	323	79	202	9	22	224	5.7	306	7.8	45+0→8	114+0→21	13+0→13	33+0→33	
200	508	170	431	106	269	11	29	299	7.6	408	10.4	60+0→11	152+0→28	17+0→17	44+0→44	
250	635	212	538	132	337	14	36	375	9.5	-	-	75+0→14	191+0→36	21+0→21	55+0→55	
300	762	254	646	159	404	17	44	450	11.4	-	-	90+0→17	229+0→43	26+0→26	65+0→65	

XD3200U

Screen size (XGA 4:3)			Default height projected image(H)		Distance from screen(L)				Movable V position from Default position				Movable H position from Default position			
Diagonal size	Width	Height			Max. Zoom	Min. Zoom			Down (H1)	Up (H2)	Down (H1)	Up (H2)	Left (W1)	Right (W1)	Left (W1)	Right (W1)
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm	inch	cm	inch
40	102	32	81	24	61	0	0	54	1.4	74	1.9	12+0→2	30+0→6	3+0→3	8+0→8	
60	152	48	122	36	91	0	0	82	2.1	112	2.8	18+0→3	46+0→9	5+0→5	12+0→12	
80	203	64	163	48	122	0	0	110	2.8	150	3.8	24+0→4	61+0→11	6+0→6	16+0→16	
100	254	80	203	60	152	0	0	138	3.5	189	4.8	30+0→6	76+0→14	8+0→8	20+0→20	
150	381	120	305	90	229	0	0	208	5.3	284	7.2	45+0→8	114+0→21	12+0→12	30+0→30	
200	508	160	406	120	305	0	0	279	7.1	380	9.7	60+0→11	152+0→28	16+0→16	41+0→41	
250	635	200	508	150	381	0	0	349	8.9	-	-	75+0→14	191+0→36	20+0→20	51+0→51	
300	762	240	610	180	457	0	0	419	10.6	-	-	90+0→17	229+0→43	24+0→24	61+0→61	

WD3300U + Optional Lenses

Screen size (WXGA 16:10)			Default height projected image(H)		OL-XD2000SZ				OL-XD2000LZ				OL-XD2000TZ				Default height projected image (H3)		OL-XD2000FR				
Diagonal Size	Width	Height			Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Max. Zoom	Min. Zoom	inch	cm	Max. Zoom				
inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm				
40	102	34	86	21	54	2	6	44	1.1	62	1.6	-	-	95	2.4	-	-	159	4.0	11	27	27	0.7
60	152	51	129	32	81	3	9	68	1.7	94	2.4	113	2.9	145	3.7	147	3.7	241	6.1	16	40	41	1.0
80	203	68	172	42	108	5	12	92	2.3	127	3.2	153	3.9	196	5.0	197	5.0	323	8.2	21	54	55	1.4
100	254	85	215	53	135	6	15	116	3.0	160	4.1	193	4.9	246	6.2	248	6.3	406	10.3	26	67	69	1.8
150	381	127	323	79	202	9	22	176	4.5	241	6.1	294	7.5	371	9.4	374	9.5	611	15.5	40	101	104	2.6
200	508	170	431	106	269	11	29	236	6.0	323	8.2	394	10.0	497	12.6	500	12.7	816	20.7	-	-	-	-
250	635	212	538	132	337	14	36	296	7.5	-	-	494	12.5	623	15.8	627	15.9	1,021	25.9	-	-	-	-
300	762	254	646	159	404	17	44	356	9.0	-	-	594	15.1	748	19.0	753	19.1	1,227	31.2	-	-	-	-

XD3200U + Optional Lenses

Screen size (XGA 4:3)			Default height projected image(H)		OL-XD2000SZ				OL-XD2000LZ				OL-XD2000TZ				Default height projected image (H3)		OL-XD2000FR				
Diagonal Size	Width	Height			Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Distance from screen(L)		Max. Zoom	Min. Zoom	inch	cm	Max. Zoom				
inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm				
40	102	32	81	24	61	0	0	41	1.0	57	1.5	-	-	88	2.2	-	-	148	3.8	12	30	25	0.6
60	152	48	122	36	91	0	0	63	1.6	88	2.2	105	2.7	135	3.4	136	3.5	224	5.7	18	46	38	1.0
80	203	64	163	48	122	0	0	86	2.2	118	3.0	142	3.6	182	4.6	183	4.7	301	7.6	24	61	51	1.3
100	254	80	203	60	152	0	0	108	2.7	148	3.8	180	4.6	228	5.8	230	5.8	377	9.6	30	76	64	1.6
150	381	120	305	90	229	0	0	164	4.2	224	5.7	273	6.9	345	8.8	348	8.8	568	14.4	45	114	97	2.5
200	508	160	406	120	305	0	0	219	5.6	300	7.6	366	9.3	462	11.7	465	11.8	759	19.3	-	-	-	-
250	635	200	508	150	381	0	0	275	7.0	-	-	459	11.7	579	14.7	583	14.8	951	24.1	-	-	-	-
300	762	240	610	180	457	0	0	331	8.4	-	-	553	14.0	696	17.7	701	17.8	1,142	29.0	-	-	-	-

The above figures are approximate and may be slightly different from the actual measurements.
Lens shifting is not available for the OL-XD2000FR (horizontal and vertical are set at 1:1)
The lens movable range shows distances from the factory default position.

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about the WD3300U/XD3200U and our other projectors, visit us at

Global.MitsubishiElectric.com/projectors/