


ControlPads
SP-08-AX-EU
8-Button
KeyPad (Europe)
With AxLink

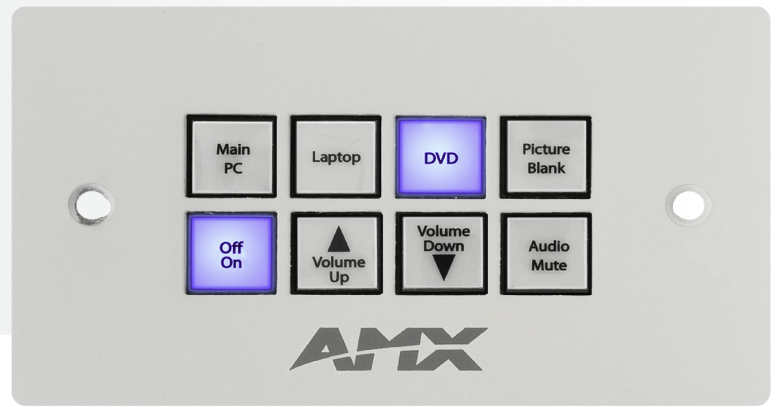

Novara SP-08-AX-EU AxLink Series KeyPads feature an 8-button layout, integrated AxLink interface and fit standard 2-gang European back box sizes. These KeyPads are extremely versatile in that they can be used to directly interface with NetLinx Controllers either by serial or AxLink connection. For added convenience, your AxLink connection also powers your KeyPad, thus reducing the need for an external power supply.

COMMON APPLICATION

A good choice for expanding control in schools, government and other applications requiring cost-effective control without having to re-train users that are already familiar with the look and operation of Novara ControlPads.

FEATURES

- 8-button panel layout
- 4-pin AxLink connector and Status LED
- Blue, backlit buttons with controllable feedback
- Includes acetate sheet with 50 pre-cut button label inserts for easy, cost effective labeling
- One bi-directional RS-232 port, with accompanying loop through port



SP-08-AX-EU-WH, White (FG1311-08-EW)

DIMENSIONS (HWD)

3 1/8" x 6" x 1 1/16" (8 cm x 15.2 cm x 2.6 cm)

WEIGHT

5.6 oz (159 grams)

POWER REQUIREMENT

Minimum: 80mA / Maximum: 130mA @ 12 VDC

BUTTON LAYOUT

- 8 buttons
- Blue, backlit buttons with controllable feedback

BACK BOX

Fits standard 2-gang European back box sizes

REAR PANEL CONNECTORS

- 4-pin AxLink connector/Status LED
- RS-232 port, with accompanying loop-through port
- Power connectors

RS-232 PROTOCOL

Baud Rate: 9600

Data Bits: 8

Stop Bits: 1


Parity: No Parity

COLORS AVAILABLE

White mounting plates

CERTIFICATIONS

IEC 60950, FCC/CE, RoHS compliant

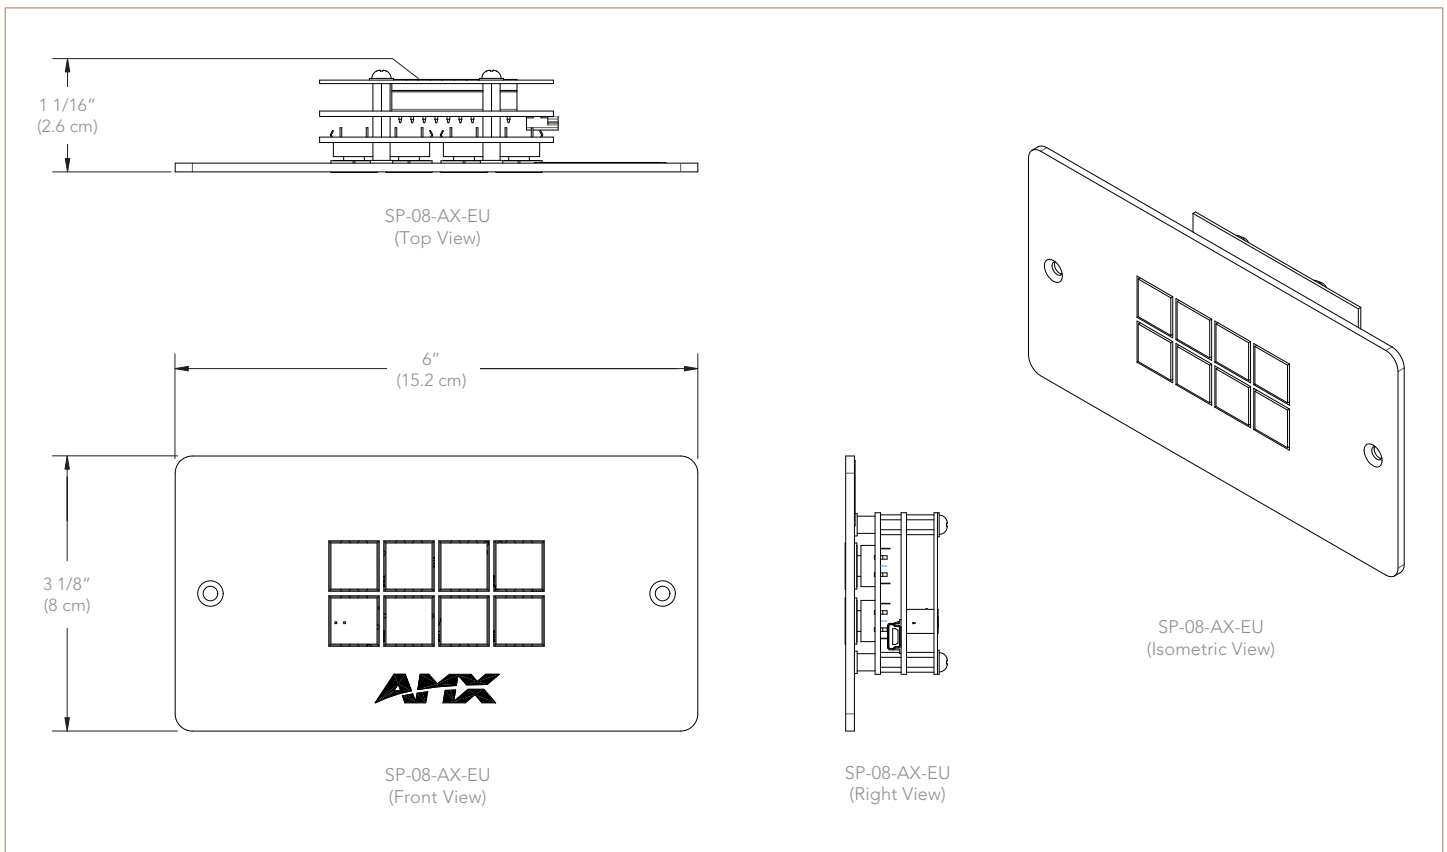

IT'S YOUR WORLD. TAKE CONTROL.